

LT50 RA CMO

(Rapid Limit Adjustment - Compact Manual Override)

525A2 CMO	1043010	540R2 CMO	1049026
530R2 CMO	1045017	550R2 CMO	1051014
535A2 CMO	1047006		




Offers control via power switching

Technical Features

Voltage Supply	120V AC, 60Hz	Temperature Working Range	14°F to 104°F (-10°C to 40°C)
Index Protection Rating	IP 44	Insulation Class	Class 1 for 120V AC
Limit Switch Type	Rapid Adjustment (RA) (includes manual override)	Wiring	Do not parallel wire.
Limit Switch Capacity	34 Turns		

Dimensions

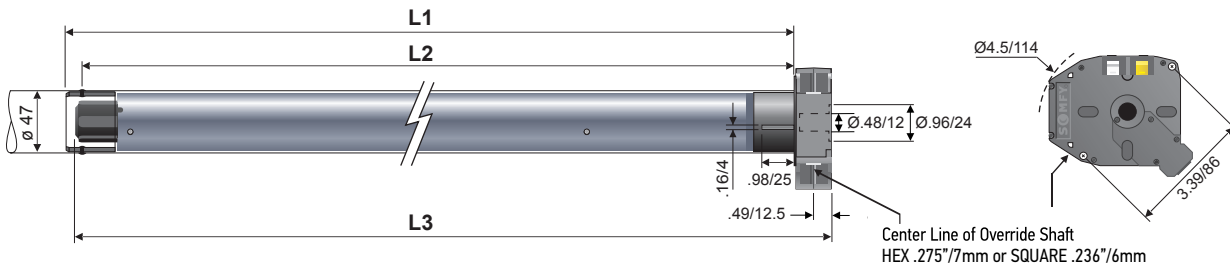

Dimensions	525A2 CMO	530R2 CMO	535A2 CMO	540R2 CMO	550R2 CMO
L1	23.39 in. (594 mm)	23.39 in. (594 mm)	26.14 in. (664 mm)	26.14 in. (664 mm)	26.14 in. (664 mm)
L2	22.80 in. (579 mm)	22.80 in. (579 mm)	25.55 in. (649 mm)	25.55 in. (649 mm)	25.55 in. (649 mm)
L3	23.90 in. (607 mm)	23.90 in. (607 mm)	26.65 in. (677 mm)	26.65 in. (677 mm)	26.65 in. (677 mm)
Cable Length	6 ft. (1.8 m)				

Optional cables available in 6 ft, 12 ft, 24 ft.

Specifications

	525A2 CMO	530R2 CMO	535A2 CMO	540R2 CMO	550R2 CMO
Torque	25 Nm	30 Nm	35 Nm	40 Nm	50 Nm
Nominal Voltage	120V / 60Hz				
Rated Current	1.6A	1.5A	2.1A	1.8A	2.1A
Speed	20 rpm	14 rpm	20 rpm	14 rpm	14 rpm
Thermal Protection	5 minutes				

Type of power cable

Wired
120V AC / 60Hz
4 conductor cable

