

Sonesse® ULTRA 50 RS485

Star Head Motor

506A2 1002566



Somfy
DESIGNED FOR
SILENCE



Somfy Digital Network (SDN), is Somfy's proprietary digital communication backbone compatible with industry standard RS485

Technical Features


Voltage Supply	120V AC, 60Hz
Index Protection Rating	IP 31 (interior use)
Limit Switch Type	Electronic
Limit Switch Capacity	300 Turns
Temperature Working Range	32°F to 140°F (0°C to 60°C) (interior use only)
Insulation Class	Class 1 for 120V AC
Wiring	Parallel wiring allowed in accordance with NEC and local electrical codes.

Specifications

Torque	6 Nm
* Minimum Torque	0.4 Nm
Nominal Voltage	120V / 60Hz
Rated Current	.95A
Speed	24 rpm
Thermal Protection	4 minutes
**Sound Level	≤ 38 dBA



Dimensions

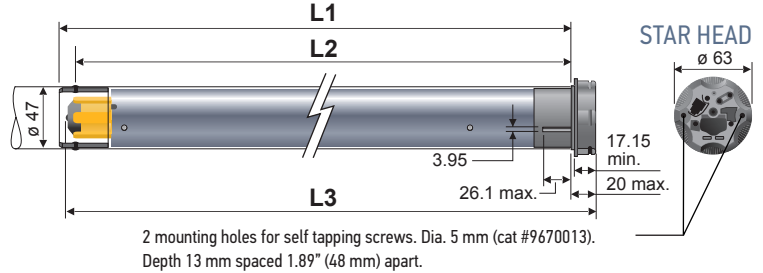


Dimensions

L1	33.0 in. (838 mm)
L2	32.5 in. (825 mm)
L3	33.6 in. (853 mm)
SJTW Power Cable Length	9.8 ft. (3 m)
Data Cable (must be ordered separately)	Customizable and available in various lengths

Optional cables with NEMA plugs available in 3 ft, 6 ft, 10 ft, 12 ft, 18 ft, 24 ft.

Type of power cable



* **Minimum Torque:** Minimum application weight to ensure smooth operation.


** **Sound Level:** According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:


- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor. Due to the variances of standard aluminum extrusion tolerances, it is recommended to screw the drive wheel & pin end to immobilize them and ensure quiet performance throughout the life of the product.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Data Cable: RJ9/RJ45 (sold separately)

RJ9 connects to motor



RJ45 connects to network



4 Cond. 26AWG modular cable with RJ9 on one end and RJ45 other end - (RTS, Z-Wave®, ZigBee modules)

GREY WITH POWER OUT	2.5 ft. long	#9018545
	8 ft. long	#9018546
	12 ft. long	#9018547
	24 ft. long	#9018548

4 Cond. 26AWG modular cable with RJ9 on one end and RJ45 other end - (SDN - animeo IP)

BLACK WITHOUT POWER OUT	2.5 ft. long	#9018541
	8 ft. long	#9018542
	12 ft. long	#9018543
	24 ft. long	#9018544

* Data cable (black) for animeo IP networks

** Data cable (grey) for powering external modules